

WOOD STAKES OR METAL REBAR


STRAW BALES TIGHTLY STACKED OR OFFSET CORNERS AS SHOWN

DRAIN GRATE

GRAVEL BACKFILL

LESS THAN 5% SLOPE

PLAN VIEW

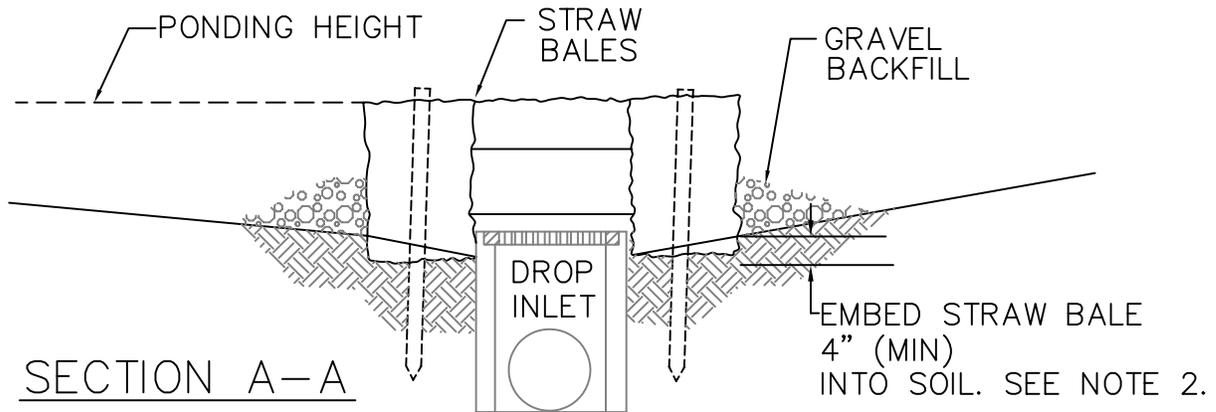

NOTES:

1. DROP INLET SEDIMENT BARRIERS ARE TO BE USED FOR SMALL, RELATIVELY LEVEL (LESS THAN 5% GRADE) DRAINAGE AREAS.
2. EMBED BALES 4 IN. INTO THE SOIL AND OFFSET CORNERS, OR, PLACE BALES WITH ENDS TIGHTLY ABUTTED. PROVIDE GRAVEL BACKFILL TO PREVENT EROSION AND FLOW AROUND THE BALES.
3. THE TOP OF THE STRUCTURE (PONDING HEIGHT) MUST BE WELL BELOW THE DOWNSLOPE GROUND ELEVATION TO PREVENT RUNOFF FROM BY PASSING THE INLET. EXCAVATION OF A BASIN ADJACENT TO THE DROP INLET, OR A TEMPORARY DIKE DOWNSLOPE OF, AND ADJACENT TO, THE STRUCTURE MAY BE NECESSARY.

No	By	Revision

CITY OF SAN PABLO

ONE ALVARADO SQUARE, SAN PABLO, CA 94806
(510) 215-3030 FAX 215-3031



Checked By: _____

Approved By: _____

PUBLIC WORKS DIVISION MANAGER DATE

**DROP INLET
SEDIMENT BARRIER**

NO SCALE

STD DET BMP-02

SHEET 1 OF 1